
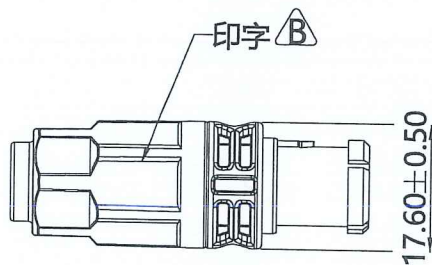




		2		3		4		5		6		7
R	F	0	3	6	C	X	X	X	X	X	X	-01
R-插座 R-socket	F-反按照方式 F-Anti-installation mode	036-Ø 3.6端子 036-Ø 3.6terminal	C-压接 C-Crimped connection	006-接6mm^2线缆 006-6mm^2线缆				BK-黑色 OR-橙色 BU-蓝色	A-A键位 B-B键位 C-C键位	-01--空中连接 -01--Air Connection		
				010-接10mm^2线缆(8AWG) 010-10mm^2线缆(8AWG)				BK-ablack OR-orange BU-blue	A-A key B-B key C-C key			

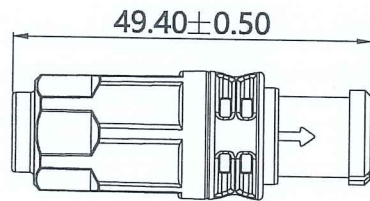



SPECIFICATIONS 规格		
CURRENT RATING	额定电流	40A(6mm ²) 65A(10mm ² , 8AWG)
OPENRATING VOLTAGE	额定电压	1500VDC (TUV) /1500VDC(UL)
WITHSTAND VOLTAGE	耐电压	4260V AC
INSULATION RESISTANCE	绝缘电阻	≥200MΩ
OPERATING TEMPERATURE	温度范围	-40° C~125° C
CONTACT RESISTANCE	接触电阻	≤0.5mΩ
DURABILITY	插拔寿命	≥100 MATING CYCLES
ROHS	环保	YES

EON2023080503	B	印字位置变更	Jackie 08/05/23'
	A	首次发行	Michael. Z 06/09/23'
EON	项次	设计变更说明	变更人/时间



型号: 单芯3.6空中连接插座	类别: 物料图	②	③	>120	±0.40
料号: RF036GXXXXX-01	单位: MM	页码: 1/2		>90~120	±0.40
图号: RF036GXXXXX-01_CUS	比例: 1:1	版次: B		>60~90	±0.30
深圳聚优精密工业有限公司 Shen Zhen GU Precision Industry Co., Ltd	设计: Michael. Z 06/09/23'			>30~60	±0.25
	审核: Jackie 07/23'			>0~30	±0.20
	核准: Michael. Z 08/08'				±1.00

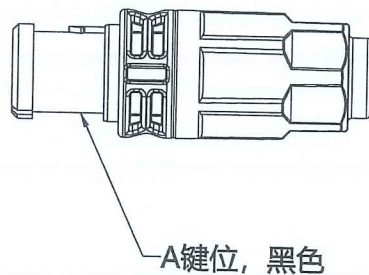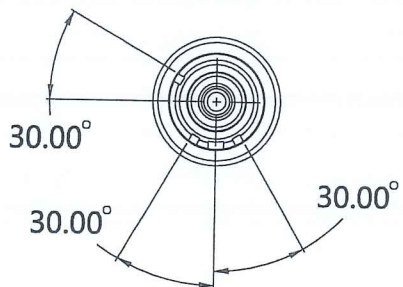

A键位, 黑色

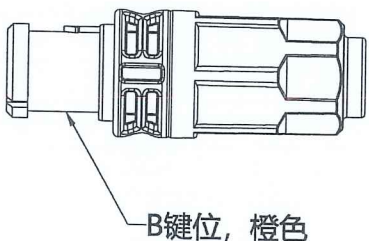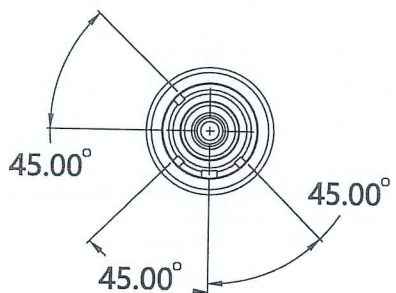


B键位, 橙色

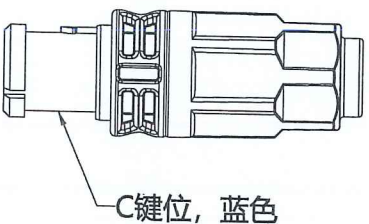

C键位, 蓝色

深圳聚优精密工业有限公司
发行 2023-08-09 日期
受控文件

线缆平方	A0
6mm ²	5.45~5.54
10mm ² (8AWG)	7.7~7.8



型号	键位	颜色	平方
RF036C006BKA-01	A键位	黑色	6mm ²
RF036C006ORB-01	B键位	橙色	
RF036C006BUC-01	C键位	蓝色	
RF036C010BKA-01	A键位	黑色	10mm ² (8AWG)
RF036C010ORB-01	B键位	橙色	
RF036C010BUC-01	C键位	蓝色	

型号: 单芯3.6空中连接插座	类别: 物料图	⊙ ⊚	>120 ±0.60
料号: RF036CXXXXX-01	单位: MM	页码: 2/2	>90~120 ±0.40
图号: RF036CXXXXX-01_CUS	比例: 1:1	版次: B	>60~90 ±0.30
 深圳聚优精密工业有限公司 Shen Zhen GU Precision Industry Co., Ltd	设计: Michael Z 06/09/23	>30~60 ±0.25	>0~30 ±0.20
	审核: Michael Z 2023.8.7	>0~30 ±0.20	>0~30 ±0.20
	核准: Michael Z 2023.8.7	>0~30 ±0.20	>0~30 ±0.20